


A reliable barrier is indispensable for the professional and progressive appearance of a toll facility. Modern barriers require innovative and future-oriented engineering as well as environmentally compatible and energy-saving technology. Magnetic.Toll barriers meet these requirements completely: While the **MHTM™** MicroDrive and the **MGC** MicroDrive and the **MGC** control secure decisive advantages for you and optimise the benefit of your toll facility, the housing and the **SwingAway** boom do not leave anything to be desired.

- **75 % less power consumption**
- **MHTM™ drive free of maintenance**
- **80 % more connectivity (I/O, TCP/IP, USB, CAN, etc.)**
- **Future-oriented, modular design**

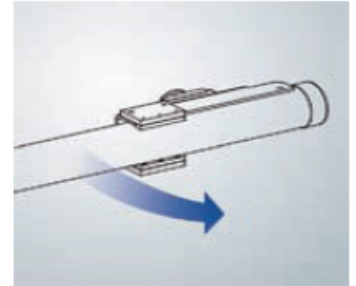

Drive

The **MHTM™** MicroDrive is not only astonishing because of its small dimensions. You get 100 % more torque at a power input reduced by 75 %. Motor, motor control and gearing are combined in one compact unit.

Control

The **MGC** control is located directly under the hood and offers extensive opportunities for expansion via optional plug-in modules. The barrier is operated via GUI-supported control keys and a large display.

Housing

The housing of aluminium and the base of stainless steel offers the best available protection against corrosion. In addition, the design is convincing and can easily be customised.

SwingAway boom

The **SwingAway** barrier boom prevents unnecessary damage to vehicles and the barrier in case of an unpermitted or forced passage.

Magnetic.Toll



WWW.INTECSEC.COM.MX

TEL. 01 55 26044640



Magnetic.Toll

Technical data	Magnetic.Toll	Magnetic.Toll Pro	Magnetic.Toll Highspeed
Barrier width max.	3 m	3 m	3 m
Opening/closing time	1.3 s	0.9 s	0.5 s
Power consumption max.	110 W	220 W	400 W
On-time		100 %	
Supply voltage	Wide voltage range 85 V – 264 V		
Frequency	50/60 Hz		
Drive	MHTM™ MicroDrive		
Housing dimensions (WxDxH)	Starting 300 mm x 345 mm x 1100 mm		
Weight without boom	44 kg		
Housing designs	Chromatised and powder-coated aluminium		
Base area	Powder-coated stainless steel		
Ingress protection	IP 54		
In line with standards	2004/108/EC, 2006/95/EC, 2006/42/EC, CE		
Temperature range	-30°C to +50°C		
Feature			
Standard colours	RAL 2000	RAL 2000	RAL 2000
Special painting	○	○	○
Control	MGC	MGC	MGC
SwingAway system	●	●	●
Boom (round, 75 mm)	●	●	●
Boom (octagon, 100 x 55 mm)	○	○ (max. 2.5 m)	○ (max. 2.5 m)
Modular expandable control	○	○	○
Number of digital inputs	8	8	8
Number of digital outputs	4	4	4
Number of relay outputs	6	6	6
Reduced closing speed selectable	●	●	●
Extended accessories	○	○	○
Specified number of cycles	10 million	10 million	10 million
Warranty	2 years	2 years	2 years

- Standard
- Optionally available
- Not available for this model



WWW.INTECSEC.COM.MX

TEL. 01 55 26044640

